
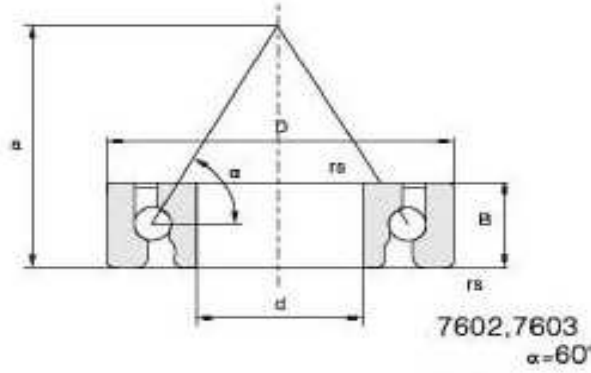


ROLAMENTO AXIAL DE ESFERA A CONTATO ANGULAR

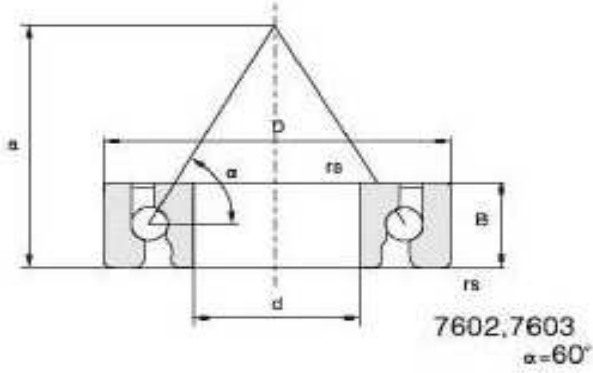

Main Dimensions (mm)					Model	Load rating kN		Maximum axial dynamic load kN	Grease lubrication at permissible revolutions min	Preload Fv kN	Friction torque Mr Nmm	Mounting dimensions(mm)			Weight (Kg)
d	D	B	rs min	a ≈		Dynamic load C	Static load Co					D1	D2	rg max	
12	32	10	0.6	24	7602012TVP	11.6	12.5	5.2	8000	1.4	15	17	27	0.6	0.042
15	35	11	0.6	27.5	7602015TVP	12.5	15	6.3	6700	1.3	20	20.5	30	0.6	0.052
17	40	12	0.6	31	7602017TVP	16.6	20	8.5	6000	1.7	30	23	34.5	0.6	0.074
20	47	14	1	36	7602020TVP	19.6	25.5	10.6	5000	2.3	50	27.5	39.5	1	0.139
20	52	15	1.1	39.5	7603020TVP	24.5	32	14	4500	2.9	60	30.5	43.5	1	0.170
25	52	15	1	41	7602025TVP	22	30.5	13.2	4500	2.5	65	32	45	1	0.147
25	62	17	1.1	47.5	7603025TVP	28.5	41.5	18	3800	3.3	85	38	52	1	0.275
30	62	16	1	48	7602030TVP	26	39	17	3800	2.9	85	39.5	52.5	1	0.232
30	72	19	1.1	55.5	7603030TVP	34.5	55	23.6	3200	4.3	130	45	61	1	0.409
35	72	17	1.1	55	7602035TVP	30	50	21.2	3200	3.3	115	46.5	60.5	1	0.339
35	80	21	1.5	61.5	7603035TVP	36.5	61	26.5	3000	4.8	170	51	67	1.5	0.546
40	80	18	1.1	62.5	7602040TVP	37.5	64	28	2800	4.3	170	53.5	69.5	1	0.418
40	90	23	1.5	68.5	7603040TVP	50	83	35.5	2600	5.6	225	56.5	75.5	1.5	0.751
45	85	19	1.1	66	7602045TVP	38	68	28	2600	4.5	190	57	73	1	0.488
45	100	25	1.5	77.5	7603045TVP	58.5	104	45	2200	7	300	64.5	85.5	1.5	0.992
50	90	20	1.1	71.5	7602050TVP	39	75	31.5	2400	4.9	230	63	79	1	0.557
50	110	27	2	85.5	7603050TVP	69.5	127	53	2000	7.6	360	72	94	2	1.29
55	100	21	1.5	77.5	7602055TVP	40.5	81.5	33.5	2200	4.6	250	69.5	85.5	1.5	0.74
55	120	29	2	91.5	7603055TVP	80	146	63	1900	8.8	460	77	101	2	1.67
60	110	22	1.5	86	7602060TVP	56	112	47.5	2000	6.5	350	77	96	1.5	0.94
60	130	31	2.1	98	7603060TVP	88	166	75	1800	10	540	82.5	107.5	2.1	2.08
65	120	23	1.5	92.5	7602065TVP	57	122	50	1800	7	410	84	103	1.5	1.19
65	140	33	2.1	107.5	7603065TVP	100	196	90	1600	12	700	91.5	118.5	2.1	2.58
70	125	24	1.5	96.5	7602070TVP	65.5	137	56	1800	7	440	87	108	1.5	1.30
70	150	35	2.1	113	7603070TVP	110	220	95	1600	12	760	95.5	124.5	2.1	3.16
75	130	25	1.5	102.5	7602075TVP	67	150	63	1600	7.6	480	93.5	114.5	1.5	1.42
75	160	37	2.1	123	7603075TVP	125	255	118	1400	15	920	105.5	135.5	2.1	3.74
80	140	26	2	109	7602080TVP	76.5	173	75	1500	8.9	600	100	122	2	1.72
80	170	39	2.1	129.5	7603080TVP	137	285	132	1400	16	1100	111	143	2.1	4.5
85	150	28	2	117	76020857VP	88	200	85	1400	11	760	107	131	2	2.17
85	180	41	3	136	7603085TVP	160	325	150	1300	18	1250	116	151	2.5	5.24
90	160	30	2	124	7602090TVP	98	224	100	1400	11	790	113.5	138.5	2	2.67
90	190	43	3	142.5	7603090TVP	163	345	160	1200	18	1300	122.5	157.5	2.5	6.18
95	170	32	2.1	131	7602095TVP	110	255	112	1300	12	950	119.5	146.5	2.1	3.25
95	200	45	3	150	7603095TVP	163	360	170	1200	19	1450	130	165	2.5	7.22
100	180	34	2.1	138	76020100TVP	122	285	125	1200	14	1100	125.5	154.5	2.1	3.9
100	215	47	3	161	76030100TVP	193	430	212	1100	22	1700	140	178	2.5	8.78