


ROLAMENTO ESFERA DE CONTATO, EM DUAS CARREIRA NÃO STANDARD LFR

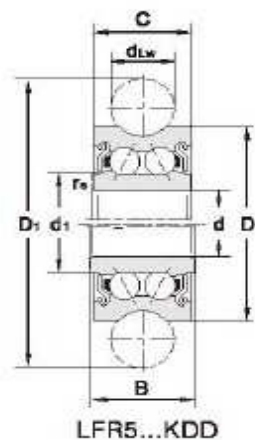

Main Dimensions (mm)								Model	Basic Dynamic	Basic Static	Reference
d	D	C	B	d _{Lw}	d ₁	D ₁	r _s		Load Ratings	Load Ratings	Weigh
									C(N)	Co(N)	(Kg)
5	17	7.0	8.0	6	8.0	27.0	0.2	LFR50/5KDD	1610	890	0.01
8	24	11.0	11.0	6	10.5	34.0	0.3	LFR50/8KDD	4100	2280	0.02
12	35	15.9	15.9	10	17.1	51.3	0.6	LFR5201KDD	8500	5100	0.08
12	35	15.9	15.9	12	17.1	55.5	0.6	LFR5201-12KDD	8300	5000	0.08
12	42	19.0	19.0	10	18.0	58.0	0.6	LFR5301KDD	13000	7700	0.10
15	47	19.0	19.0	10	21.7	63.3	1.0	LFR5302KDD	14500	9200	0.17
20	52	20.6	22.6	16	26.5	79.0	1.0	LFR5204-16KDD	14600	9500	0.23
25	72	23.8	25.8	20	37.4	102.0	1.0	LFR5206-20KDD	22800	16200	0.25
25	72	23.8	25.8	25	37.4	112.0	1.0	LFR5206-25KDD	22400	15900	0.25
30	80	27.0	29.0	30	42.4	132.0	1.0	LFR5207-30KDD	28500	20800	0.66
40	98	36.0	38.0	40	48.4	165.0	1.1	LFR5208-40KDD	38500	29000	1.36