


ROLAMENTO RADIAL DE ESFERAS RIGIDAS EM INOX




Open type



With dust cover
on both sides
(2Z)



With dust cover
Contact sealed type
(2RS)

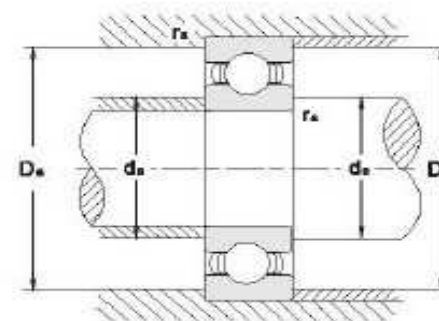

Main Dimensions(mm)				Model			Basic Dynamic	Basic Static	Permissible Rotational Speed(rpm)			Assembly Dimensions(mm)			Reference Weight (Kg)
d	D	B	r (Min)	Open type	Shielded type	Contact sealed type	Load Ratings C(N)	Load Ratings Co(N)	Grease Lubrication Open type.2Z.	Grease Lubrication 2RS	Grease Lubrication Open type	da (Max)	Da (Max)	ra (Max)	
10	19	5	0.30	S61800	S61800-2Z	S61800-2RS	1840	925	35000	23000	40000	12	17	0.30	0.0050
10	22	6	0.30	S61900	S61900-2Z	S61900-2RS	2700	1270	33000	21000	38000	12	20	0.30	0.0090
10	26	8	0.30	S6000	S6000-2Z	S6000-2RS	4550	1970	30000	19000	36000	12	24	0.30	0.0190
10	30	9	0.60	S6200	S6200-2Z	S6200-2RS	5100	2390	24000	17000	30000	15	25	0.60	0.0320
10	35	11	0.60	S6300	S6300-2Z	S6300-2RS	8100	3450	21000	15000	26000	15	30	0.60	0.0530
12	21	5	0.30	S61801	S61801-2Z	S61801-2RS	1900	1040	32000	21000	39000	14	19	0.30	0.0060
12	24	6	0.30	S61901	S61901-2Z	S61901-2RS	2900	1460	30000	19000	35000	14	22	0.30	0.0110
12	28	8	0.30	S6001	S6001-2Z	S6001-2RS	5100	2390	27000	17000	32000	14	26	0.30	0.0230
12	32	10	0.60	S6201	S6201-2Z	S6201-2RS	6800	3050	22000	15000	27000	17	27	0.60	0.0370
12	37	12	1.00	S6301	S6301-2Z	S6301-2RS	9800	4250	19000	14000	24000	18	31	1.00	0.0600
15	24	5	0.30	S61802	S61802-2Z	S61802-2RS	2080	1260	27000	17000	32000	17	22	0.30	0.0070
15	28	7	0.30	S61902	S61902-2Z	S61902-2RS	4300	2250	26000	15000	31000	17	26	0.30	0.0160
15	32	9	0.30	S6002	S6002-2Z	S6002-2RS	5600	2840	23000	14000	28000	17	30	0.30	0.0320
15	35	11	0.60	S6202	S6202-2Z	S6202-2RS	7650	3700	19000	13000	24000	20	30	0.60	0.0450
15	42	13	1.00	S6302	S6302-2Z	S6302-2RS	11400	5400	17000	12000	20000	21	36	1.00	0.0820
17	26	5	0.30	S61803	S61803-2Z	S61803-2RS	2630	1570	25000	15000	30000	19	24	0.30	0.0080
17	30	7	0.30	S61903	S61903-2Z	S61903-2RS	4600	2550	24000	14500	29000	19	28	0.30	0.0180
17	35	10	0.30	S6003	S6003-2Z	S6003-2RS	6000	3250	20000	13000	25000	19	33	0.30	0.0390
17	40	12	0.60	S6203	S6203-2Z	S6203-2RS	9550	4800	17000	12000	21000	22	35	0.60	0.0650
17	47	14	1.00	S6303	S6303-2Z	S6303-2RS	13600	6550	15000	11000	18000	23	41	1.00	0.1150
20	32	7	0.30	S61804	S61804-2Z	S61804-2RS	4000	2470	20000	13000	24000	22	30	0.30	0.0190
20	37	9	0.30	S61904	S61904-2Z	S61904-2RS	6350	3700	19000	12000	23000	22	35	0.30	0.0360
20	42	12	0.60	S6004	S6004-2Z	S6004-2RS	9400	5000	17000	11000	21000	24	38	0.60	0.0700

Main Dimensions(mm)				Model			Basic Dynamic Load Ratings C(N)	Basic Static Load Ratings Co(N)	Permissible Rotational Speed(rpm)			Assembly Dimensions(mm)			Reference Weight (Kg)
d	D	B	r (Min)	Open type	Shielded type	Contact sealed type			Grease Lubrication Open type.2Z.	Grease Lubrication 2RS	Grease Lubrication Open type	d _a (Max)	D _a (Max)	r _a (Max)	
20	47	14	1.00	S6204	S6204-2Z	S6204-2RS	12800	6600	14000	10000	18000	26	41	1.00	0.1060
20	52	15	1.10	S6304	S6304-2Z	S6304-2RS	15900	7900	13000	9500	16000	27	45	1.00	0.1440
25	37	7	0.30	S61805	S61805-2Z	S61805-2RS	4300	2950	18000	12000	20000	27	35	0.30	0.0220
25	42	9	0.30	S61905	S61905-2Z	S61905-2RS	7000	4500	16000	10000	20000	27	40	0.30	0.0410
25	47	12	0.60	S6005	S6005-2Z	S6005-2RS	10100	5850	15000	9500	18000	29	43	0.60	0.0790
25	52	15	1.00	S6205	S6205-2Z	S6205-2RS	14000	7900	12000	8500	16000	31	46	1.00	0.1280
25	62	17	1.10	S6305	S6305-2Z	S6305-2RS	23600	12100	11000	7500	14000	32	55	1.00	0.2320
30	42	7	0.30	S61806	S61806-2Z	S61806-2RS	4500	3400	15000	9500	17000	32	40	0.30	0.0260
30	47	9	0.30	S61906	S61906-2Z	S61906-2RS	7250	5000	14000	9000	16000	32	45	0.30	0.0450
30	55	13	1.00	S6006	S6006-2Z	S6006-2RS	13200	8300	12000	8000	15000	35	50	1.00	0.1170
30	62	16	1.00	S6206	S6206-2Z	S6206-2RS	19500	11300	10000	7500	13000	36	56	1.00	0.1990
35	47	7	0.30	S61807	S61807-2Z	S61807-2RS	4900	4000	13000	8000	15000	37	45	0.30	0.0290
35	55	10	0.60	S61907	S61907-2Z	S61907-2RS	10400	7150	12000	7700	14000	39	51	0.60	0.0730
35	62	14	1.00	S6007	S6007-2Z	S6007-2RS	16000	10300	11000	7000	13000	40	57	1.00	0.1560
35	72	17	1.10	S6207	S6207-2Z	S6207-2RS	25700	15300	9000	6300	11000	42	65	1.00	0.2880
40	52	7	0.30	S61808	S61808-2Z	S61808-2RS	5050	4350	12000	7500	14000	42	50	0.30	0.0330
40	62	12	0.60	S61908	S61908-2Z	S61908-2RS	13700	9900	11000	7000	13000	44	58	0.60	0.1090
40	68	15	1.00	S6008	S6008-2Z	S6008-2RS	16800	11500	9500	6500	12000	45	63	1.00	0.1940
40	80	18	1.10	S6208	S6208-2Z	S6208-2RS	29100	17900	8200	5600	10000	47	73	1.00	0.3660
45	58	7	0.30	S61809	S61809-2Z	S61809-2RS	6400	5500	11000	6800	13000	47	56	0.30	0.0400
45	75	16	1.00	S6009	S6009-2Z	S6009-2RS	21000	15200	8800	5500	11000	50	70	1.00	0.2460